YUMBO BATANERO

Equipos de arrastre

CATÁLOGO DE PRODUCTOS

Remolques de equipaje

Dollies para carga aérea

Escaleras para pasajeros



01 EQUIPAJE



02 CARGA



03 ACCESO

www.handlingyumbo.com

info@handlingyumbo.com

Nuestra empresa

YUMBO BATANERO es una primera marca a nivel internacional, líder en el sector del handling, con más de 50 años de experiencia y cientos de clientes que avalan nuestra marca.

FABRICACIÓN

Remolques industriales para la logística interna en fábricas (de 1 a 50 toneladas).

Equipos para handling en aeropuertos.

Nuestros equipos



Índice de productos

01 **Remolques de equipaje** **5**

2 fichas

02 **Dollies LD3 / LD8** **7**

5 fichas

03 **Dollies de 10 pies** **12**

7 fichas

04 **Dollies de 20 y 40 pies** **19**

5 fichas

05 **Escalera remolcable para pasajeros** **24**

1 ficha

Leasing / Renting: pág. 25 | Contacto: pág. 26

Model No.: HD–P011402

Open Baggage Trailer





Model No.: HD–P011402

Open Baggage Trailer

FEATURES:

*Four sides rail baggage trailers.(Rails design could be customized)
*Side rails could be lay down.
*Front bearing turntable(fifth wheel) steering.
*Brake works when towbar is at upright position or at freely down position, which increase much the safety when the trailer is running.
*V-shape decks with drainage for rain water or dust.
*E-shape spring loaded safe tow hitch.
*Rain tarp and tarp basket are optional.
*Forklift pockets for easy moving job.
*Easy maintenance jobs.

SPECIFICATION:

*Overall dimensions (LxWxH): 4140x1500x1260mm (Could be customized)
*Working flat dimensions(LxWxH):2500x1500x520mm(Could be customized)
*Capacity: 2500kgs
*Tyres: 400-8 super elastic solid rubber tyres.(600-9 Pneumatic tyres option)
*Weight: 700kgs
*Maximum towing speed:25km/h.

MORE TRAILERS









Model No.: HD–P011422
Rain-Proof Baggage Trailer





Model No.: HD–P011422
Rain–Proof Baggage Trailer

FEATURES:

*Excellent design rain-proof trailer for baggage or cargo transportation.
*The curtains can be opened at both sides. (One side open option)
*Front bearing turntable(fifth wheel) steering.
*Brake works when towbar is at upright position or at freely down position.
*The brake working when towbar is at down position increase much the safety when the trailer is running.
*V-shape decks with drainage for rain water or dust
*E-shape spring loaded safe tow hitch.
*Forklift pocket for easy moving job.
*Easy maintenance jobs.

SPECIFICATION:

*Overall dimensions (LxWxH): 4000x1500x1800mm (Could be customized)
*Working flat dimensions(LxWxH):2760x1500x520mm(Could be customized)
*Capacity: 3500kgs (7700 Lbs)
*Tyres: 400-8 super elastic solid rubber tyres.(600-9 Pneumatic tyres option)
*Weight: 860kgs
*Maxmium towing speed:25km/h.





Model No.: HD–P011603

LD3/LD1,LD2 CONTAINER DOLLY





Model No.: HD–P011603

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

*ULD to handle : LD3, LD1/LD2 container.
*Front bearing turntable(fifth wheel) steering.
*Easy hand control stops (LD2 container stops option)
*360 degree rotation turntable can stop at any 90 or 180 degree position.
*Foot pedal control turntable position pin, easy, efficient and less maintenance design.
*Brake works when towbar is at freely down position, which increase much the safety when the dolly is running
*Heavy duty 76mm dia. roller.
*Lead-in rollers at both ends ensure easily loading/unloading.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 3500mm x 1770mm x 560mm
*Woking flat dimensions(LxWxH):1915mm x 1554mm x 520mm
*Capacity: 1600kgs
*Tyres: 15x4.5-8 super elastic solid rubber tyres.
*Weight: 720kgs
*Maxmium towing speed:25km/h.



Model No.: HD–P011604

LD3/LD1,LD2 CONTAINER DOLLY





Model No.: HD–P011604

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

*ULD to handle : LD3, LD1/LD2 container.
*Front bearing turntable(fifth wheel) steering.
*Easy hand control stops (LD2 container stops option)
*360 degree rotation turntable can stop at any 90 or 180 degree position.
*Foot pedal control turntable position pin, easy, efficient and less maintenance design.
*Brake works when towbar is at upright position or freely down position, which increase much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*Lead-in roller at the ends for easily loading/unloading.
*Infils between rollers ensure operator's safety.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 3666mm x 1860mm x 568mm
*Woking flat dimensions(LxWxH):1910mm x 1860mm x 520mm
*Capacity: 1600kgs
*Tyres: 15x4.5-8 super elastic solid rubber tyres.
*Weight: 750kgs
*Maxmium towing speed:25km/h.



Model No.: HD–P011606

LD3/LD1,LD2 CONTAINER DOLLY





Model No.: HD–P011606

LD3/LD1,LD2 CONTAINER DOLLY

FEATURES:

*ULD to handle: LD3, LD1/LD2 container
*Front bearing turntable(fifth wheel) steering.
*Easy manual control stops.
*360 degree rotation turntable can stop at any 90 or 180 degree position.
*Foot pedal control turntable position pin.
*Brake works when towbar is at upright position or freely down position, which increase much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*Lead-in roller at the ends for easily loading and unloading
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 3520mm x 1770mm x 563mm
*Woking flat dimensions(LxWxH):2216mm x 1770mm x 518mm
*Capacity: 1600kgs
*Tyres: 15x4.5-8 super elastic solid rubber tyres.
*Weight: 720kgs
*Maxmium towing speed:25km/h.



Número de modelo: HD–P011609

CARRO CONTENEDOR LD3/LD1,LD2,LD8





Número de modelo: HD–P011609

CARRO CONTENEDOR LD3/LD1,LD2,LD8

Caracteristicas

*ULD para manipular: Contenedor LD3/LD1,LD2 o LD8
* Dirección de la plataforma giratoria del cojinete delantero (quinta rueda).
* Paradas de fácil control manual.
*El plato giratorio de rotación de 360 grados puede detenerse en cualquier posición de 90 o 180 grados.
* Pasador de posición de la plataforma giratoria de control del pedal.
*El freno funciona cuando la barra de remolque está en posición vertical
* Servicio pesado de 76 mm de diámetro. rodillo.
*Rodillo de entrada en los extremos para facilitar la carga y descarga
* Enganche de remolque seguro con resorte en forma de E.
*Estructura resistente con acero de alta calidad y soldadura MIG con núcleo fundente.
*Trabajos de fácil mantenimiento.
* Galvanizado en caliente para opcional.

Especificación:

* Dimensiones generales (LxAnxAl): 4320 mm x 1860 mm x 561 mm
* Dimensiones planas de trabajo (LxWxH): 3000 mm x 1660 mm x 516 mm
*Capacidad: 2500kg
*Neumáticos: 400-8 neumáticos de caucho macizo superelásticos.
*Peso: 913kg
*Velocidad máxima de remolque: 30 km/h.

Model No.: HD–P011610

2 x LD1/LD3,LD8,LD11 CONTAINER DOLLY

Model No.: HD–P011610

2 x LD1/LD3,LD8,LD11 CONTAINER DOLLY





FEATURES:

*ULD to handle: 2 X LD3 or 2 x LD1,1 X LD8, 1XLD11 container
*Front bearing turntable(fifth wheel) steering.
*Easy manual control stops.
*Brake works when towbar is at upright position
*Heavy duty 76mm dia. roller.
*Lead-in roller at the ends for easily loading and unloading
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 5252mm x 1690mm x 564mm
*Woking flat dimensions(LxWxH):3280mm x 1690mm x 564mm
*Capacity: 2500kgs
*Tyres: 400-8 super elastic solid rubber tyres.
*Weight: 750kgs
*Maxmium towing speed:30km/h.



Model No.: HD-P011703

10FEET PALLET DOLLY





Model No.: HD-P011703

10FEET PALLET DOLLY

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*96" side loading.
*Front swivel castor steering.
*Brake works when towbar is upright position or at freely down position, which increases much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 3660mm x 3460mm x 560mm
*Working flat dimensions(LxWxH):3460mm x 2660mm x 515mm
*Capacity: 7000kgs
*Tyres: Front 320-8,Rear 350x100 super elastic solid rubber tires
400-8 super solid rubber tires for optional
*Weight: 1150kgs
*Maximum towing speed:25km/h.



Model No.: HD-P011704

10FEET PALLET DOLLY





Model No.: HD-P011704

10FEET PALLET DOLLY

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*125"side loading.
*Front bearing turntable steering.
*Brake works when towbar is upright position or at freely down position, which increase much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*Lock holding safe tow hitch.(E-shape spring loaded safe tow hitch option)
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 5023mm x 2600mm x 571mm
*Working flat dimensions(LxWxH):3300mm x 2600mm x 510mm
*Capacity: 7000kgs
*Tyres: 16x5-9 super elastic solid rubber tyres.
*Weight: 1350kgs
*Maximum towing speed:25km/h.



Model No.: HD-P011707

10FEET PALLET DOLLY





Model No.: HD-P011707

10FEET PALLET DOLLY

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*96" side loading.
*Front swivel castor steering.
*Brake works when towbar is upright position or at freely down position, which increase much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 4137x3460x560mm
*Working flat dimensions(LxWxH): 3460x2610mmx518mm
*Capacity: 7000kgs
*Tyres: Front 320-8,Rear 350x100 super elastic solid rubber tyres.
400-8 super solid rubber tires for optional
*Weight: 1150kgs
*Maximum towing speed:25km/h.

Model No.: HD–P011708

10FEET CASTOR-BED PALLET DOLLY
with Safety Cover



Model No.: HD–P011708

10FEET CASTOR-BED PALLET DOLLY
with Safety Cover

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*96" side loading or 125" side loading.
*Heavy duty front swivel castor steering.
*Brake works when towbar is upright position
*Heavy duty castors bed, on which the pallet or container can rotate 360 degree.
* Cover available for safety purpose.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.


SPECIFICATION:

*Overall dimensions (LxWxH): 4707mm x 2590mm x 513mm
*Working flat dimensions(LxWxH): 3420mm x 2590mm x 513mm
*Capacity: 7000kgs
*Tyres: 400-8 super elastic solid rubber tyres.
*Weight: 1108kgs
*Maximum towing speed:25km/h.

www.handlingyumbo.com

Model No.: HD-P011709

10FEET PALLET DOLLY

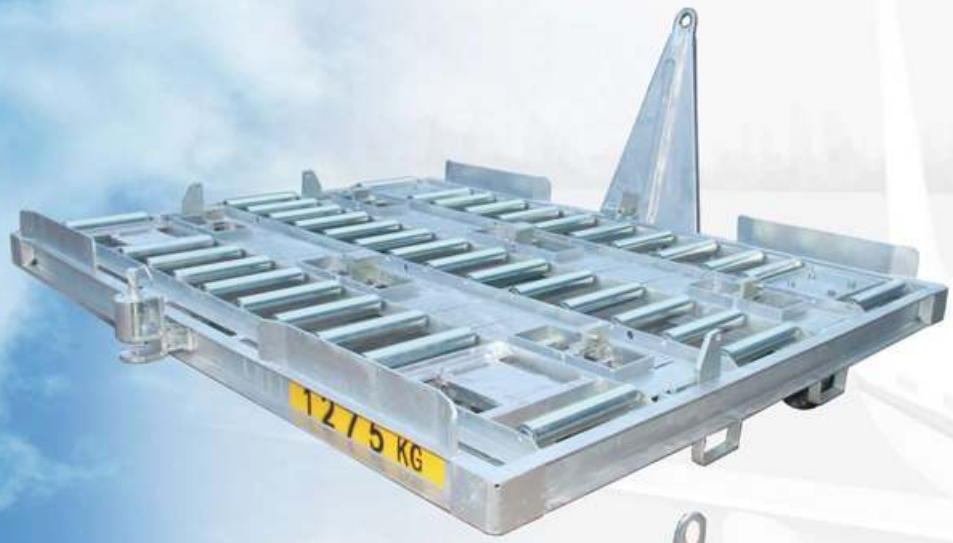



Model No.: HD-P011709

10FEET PALLET DOLLY

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*96" side loading.
*Heavy duty front swivel castor steering.
*Brake works when towbar is upright position or at freely down position, which increases much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 4084mm x 3356mm x 560mm
*Working flat dimensions(LxWxH): 3356mm x 2620mm x 518mm
*Capacity: 7000kgs
*Tyres: 400-8 super elastic solid rubber tyres.
*Weight: 1275kgs
*Maximum towing speed:25km/h.



Model No.: HD-P011710

10FEET PALLET DOLLY





Model No.: HD-P011710


10FEET PALLET DOLLY

FEATURES:

*ULD to handle: LD1/LD3,LD8 container, or any container and pallet with the bottom size 125"x96", 125"x88"and 108"x88".
*96" side loading.
*Heavy duty front swivel castor steering.
*Brake works when towbar is upright position or at freely down position, which increases much the safety when the dolly is running.
*Heavy duty 76mm dia. roller.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 4170mm x 3390mm x 598mm
*Working flat dimensions(LxWxH): 3390mm x 2640mm x 518mm
*Capacity: 7000kgs
*Tyres: 400-8 super elastic solid rubber tyres.
*Weight: 1460kgs
*Maximum towing speed:25km/h.

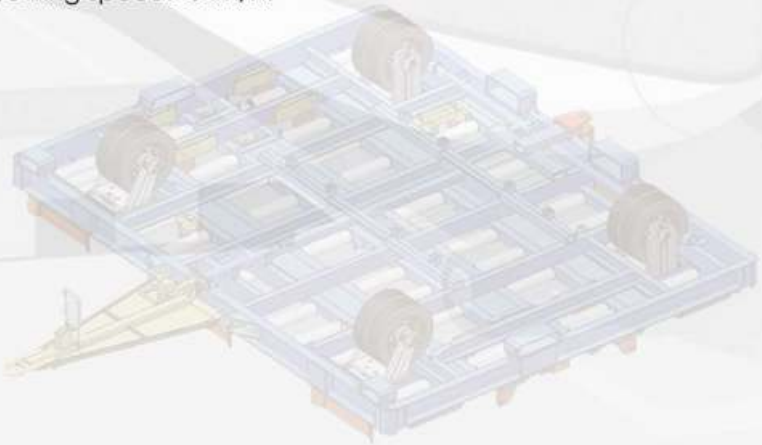

Model No.: HD–P011711

10FEET PALLET DOLLY
LD7 DOLLY





Model No.: HD–P011711

10FEET PALLET DOLLY
LD7 DOLLY

FEATURES:

* ULD to handle: any container and pallet with the bottom size 125"x96", 125"x88", or 108"x 88".(Stops for LD1/LD3, LD8 containers are for option)
*125"side loading.
*Heavy duty swivel castor steering.
*Brake works when towbar is upright position or at freely down position, which increases much the safety when the dolly is running.
*Heavy duty 76mm dia roller.
*E-shape spring loaded safe tow hitch.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

* Overall dimensions (LxWxH): 4898mm x 2650mm x 645mm
* Woking flat dimensions(LxWxH):3400mm x 2650mm x 518mm
* Capacity: 7000kgs
* Tyres: 400-8 super elastic solid rubber tyres.
* Weight: 1275kgs
* Maximum towing speed:25km/h.

Model No.: HD-P011501

20FEET PALLET DOLLY





Model No.: HD-P011501

20FEET PALLET DOLLY

FEATURES:

*ULD to handle: 10ft, 16ft or 20ft pallet.
*96"end loading.
*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
*Brake works when towbar is at upright position.
*Heavy duty 89mm dia. rollers.
*Heavy duty 112mm dia. lead-in rollers at the end.
*Tow hitch for option.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 7983mm x2720mm x570mm
*Working flat dimensions(LxWxH): 6682mm x 2720mmx520mm
*Capacity: 18000kgs
30000kgs(for optional)
*Tyres: Front 266x160 solid rubber (12nos), Rear 400x133 solid rubber(8 nots).
*Weight: 3200kgs
*Maximum towing speed:20km/h.



Model No.: HD–P011502

20FEET PALLET DOLLY WITH ROLLER INDEX





Model No.: HD–P011502

20FEET PALLET DOLLY WITH ROLLER INDEX

FEATURES:

*ULD to handle: 10ft, 16ft or 20ft pallet.
*96"end loading or 250" side loading (By changing the roller index direction)
*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
*Brake works when towbar is at upright position.
*Heavy duty 76mm dia. roller.
*Heavy duty 112mm dia. lead-in rollers at the end and 8x76mm dia lead-in rollers at each side.
*Tow hitch for option.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 8155mm x2643mm x611mm
*Working flat dimensions(LxWxH): 6910mm x2643mmx536mm
*Capacity: 18000kgs
30000kgs(for optional)
*Tyres: Front 266x160 solid rubber (12nos), Rear 400x133 solid rubber(8 nos).
*Weight: 3500kgs
*Maximum towing speed:20km/h.



Model No.: HD–P011503

CASTER BED 20FEET PALLET DOLLY





Model No.: HD–P011503

CASTER-BED 20FEET PALLET DOLLY

FEATURES:

*ULD to handle: 10ft, 16ft or 20ft pallet.
*Three sides loading.
*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
*Brake works when towbar is at upright position
*Heavy duty castor-bed on which the pallet or container can rotate 360 degree.
*Heavy duty leading finger at both sides
*Tow hitch for option.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing for option.

SPECIFICATION:

*Overall dimensions (LxWxH): 6662mm x3226mm x607mm
*Working flat dimensions(LxWxH): 6662mm x 2720mmx512mm
*Capacity: 35000kgs
18000kgs (for optional)
*Tyres: Front 266x160 solid rubber (16nos), Rear 400x133 solid rubber(8 nots).
*Weight: 4500kgs
*Maximum towing speed:20km/h.

Model No.: HD-P011801

40FEET PALLET DOLLY





Model No.: HD-P011801

40FEET PALLET DOLLY

FEATURES:


*ULD to handle: 20ft, 40ft pallet or any other big size cargo.
*96"end loading.
*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
*Adjustable support feet works as the brake.
*Heavy duty 89mm dia. roller.
*Heavy duty 112mm dia. lead-in rollers at the end.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 13767mm x2720mm x536mm
*Working flat dimensions(LxWxH):12220mm x 2720mm x 518mm
*Capacity: 36000kgs
*Tyres: Front 266x160 solid rubber (24nos), Rear 400x133 solid rubber(8 nots).
*Weight: 7500kgs
*Maximum towing speed:15km/h.

Model No.: HD–P011802

40FEET PALLET DOLLY WITH ROLLER INDEX

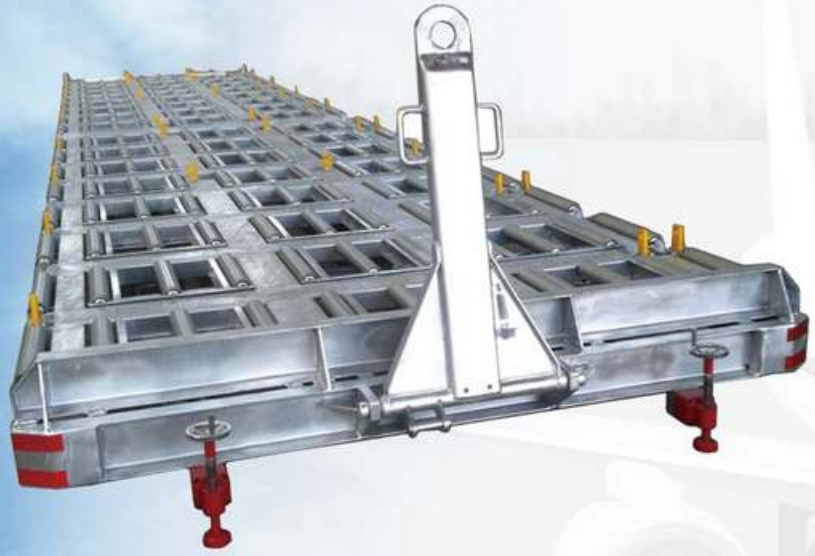



Model No.: HD–P011802

40FEET PALLET DOLLY WITH ROLLER INDEX

FEATURES:

*ULD to handle: 20ft, 40ft pallet or any other big size cargo.
*96"end loading or 500" side loading (By changing the roller index direction).
*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
*Adjustable support feet work as the brake.
*Heavy duty 76mm dia. roller.
*Heavy duty 112mm dia. lead-in rollers at the end and 16x76mm dia. lead-in rollers at each side.
*Heavy duty frame with high quality steel and flux core MIG welding.
*Easy maintenance jobs.
*Hot dip galvanizing.

SPECIFICATION:

*Overall dimensions (LxWxH): 13934mm x2643mm x536mm
*Working flat dimensions(LxWxH):12412mm x 2643mm x 518mm
*Capacity: 36000kgs
*Tyres: Front 266x160 solid rubber tyres (24nos),
Rear 400x133 solid rubber tyres(8 nots).
*Weight: 7500kgs
*Maximum towing speed:15km/h.

Modelo: HD-PS3600A
Escaleras remolcables para pasajeros



Modelo: HD-PS3600A

Escaleras remolcables para pasajeros

La escalera de pasajeros remolcable es una escalera de pasajeros no motorizada sin chasis ni motor; presenta una estructura simple, un punto de gravedad bajo y un buen equilibrio, es ecológico, tiene bajos costos de mantenimiento y es fácil de operar. Puede ser operado por 1 o 2 personas cuando se aproxima a la aeronave y remolcado por un tractor de remolque de equipaje cuando se mueve a una distancia larga. Es una opción económica para aeropuertos pequeños y medianos y también adecuada para la plataforma en grandes aeropuertos internacionales o aerolíneas. Es adecuado para aviones A318, A319, A320, B707, B727, B737, DC-8/40/50F, DC8-61/61F, DC8-62/62F, DC8-63/63F, IL-18, etc. . También se puede utilizar como un paso de trabajo para la tripulación de un avión.

ESPECIFICACIONES Y CARACTERÍSTICAS:

- Para embarque/desembarque rápido y fácil de pasajeros para operaciones de asistencia en tierra concurridas.
- Diseño y construcción simple, fuerte y confiable.
- Muévase empujando o remolcando para facilitar las operaciones
- Parachoques disponible por seguridad
- Alto costo efectivo
- Cuatro estabilizadores hidráulicos disponibles para un buen rendimiento del equilibrio
- Escaleras y plataforma antideslizantes
- Elevación hidráulica de potencia del motor
- Batería: Varta 2x12v/100A
- Tanto la energía solar como la carga por cable.
- Personalizado disponible
- Altura de servicio: 2200 mm-3400 mm (para A320, B737)
  2200mm-4500mm(para A330,B777) para opcional





www.handlingyumbo.com

Leasing / Renting

Tambien estudiamos de forma DIRECTA, las posibilidades de LEASING / RENTING (para España)







YUMBO BATANERO

Equipos de arrastre

CONTACTO

Conoce nuestros equipos y solicita información.

PÁGINA WEB

www.handlingyumbo.com

CORREO ELECTRÓNICO

info@handlingyumbo.com