

## Model No.: HD-P011501

### 20FEET PALLET DOLLY



## Model No.: HD-P011501

### 20FEET PALLET DOLLY

#### FEATURES:

- \*ULD to handle: 10ft, 16ft or 20ft pallet.
- \*96" end loading.
- \*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
- \*Brake works when towbar is at upright position.
- \*Heavy duty 89mm dia. rollers.
- \*Heavy duty 112mm dia. lead-in rollers at the end.
- \*Tow hitch for option.
- \*Heavy duty frame with high quality steel and flux core MIG welding.
- \*Easy maintenance jobs.
- \*Hot dip galvanizing.

#### SPECIFICATION:

- \*Overall dimensions (LxWxH): 7983mm x 2720mm x 570mm
- \*Working flat dimensions (LxWxH): 6682mm x 2720mm x 520mm
- \*Capacity: 18000kgs  
30000kgs (for optional)
- \*Tyres: Front 266x160 solid rubber (12nos), Rear 400x133 solid rubber (8 nos).
- \*Weight: 3200kgs
- \*Maximum towing speed: 20km/h.



[www.handlingyumbo.com](http://www.handlingyumbo.com)  
[info@handlingyumbo.com](mailto:info@handlingyumbo.com)

## Model No.: HD-P011502

### 20FEET PALLET DOLLY WITH ROLLER INDEX



## Model No.: HD-P011502

### 20FEET PALLET DOLLY WITH ROLLER INDEX

#### FEATURES:

- \*ULD to handle: 10ft, 16ft or 20ft pallet.
- \*96" end loading or 250" side loading ( By changing the roller index direction )
- \*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
- \*Brake works when towbar is at upright position.
- \*Heavy duty 76mm dia. roller.
- \*Heavy duty 112mm dia. lead-in rollers at the end and 8x76mm dia lead-in rollers at each side.
- \*Tow hitch for option.
- \*Heavy duty frame with high quality steel and flux core MIG welding.
- \*Easy maintenance jobs.
- \*Hot dip galvanizing.

#### SPECIFICATION:

- \*Overall dimensions (LxWxH): 8155mm x2643mm x611mm
- \*Working flat dimensions(LxWxH): 6910mm x2643mmx536mm
- \*Capacity: 18000kgs  
30000kgs(for optional)
- \*Tyres: Front 266x160 solid rubber (12nos), Rear 400x133 solid rubber( 8 nos).
- \*Weight: 3500kgs
- \*Maximum towing speed:20km/h.



[www.handlingyumbo.com](http://www.handlingyumbo.com)  
[info@handlingyumbo.com](mailto:info@handlingyumbo.com)



## Model No.: HD-P011503

### CASTER BED 20FEET PALLET DOLLY



## Model No.: HD-P011503

### CASTER-BED 20FEET PALLET DOLLY

#### FEATURES:

- \*ULD to handle: 10ft, 16ft or 20ft pallet.
- \*Three sides loading.
- \*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
- \*Brake works when towbar is at upright position
- \*Heavy duty castor-bed on which the pallet or container can rotate 360 degree.
- \*Heavy duty leading finger at both sides
- \*Tow hitch for option.
- \*Heavy duty frame with high quality steel and flux core MIG welding.
- \*Easy maintenance jobs.
- \*Hot dip galvanizing for option.

#### SPECIFICATION:

- \*Overall dimensions (LxWxH): 6662mm x3226mm x607mm
- \*Working flat dimensions(LxWxH): 6662mm x 2720mmx512mm
- \*Capacity: 35000kgs  
18000kgs (for optional)
- \*Tyres: Front 266x160 solid rubber (16nos), Rear 400x133 solid rubber( 8 nots).
- \*Weight: 4500kgs
- \*Maximum towing speed:20km/h.



[www.handlingyumbo.com](http://www.handlingyumbo.com)  
[info@handlingyumbo.com](mailto:info@handlingyumbo.com)

## Model No.: HD-P011801

### 40FEET PALLET DOLLY



## Model No.: HD-P011801

### 40FEET PALLET DOLLY

#### FEATURES:

- \*ULD to handle: 20ft, 40ft pallet or any other big size cargo.
- \*96" end loading.
- \*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
- \*Adjustable support feet works as the brake.
- \*Heavy duty 89mm dia. roller.
- \*Heavy duty 112mm dia. lead-in rollers at the end.
- \*Heavy duty frame with high quality steel and flux core MIG welding.
- \*Easy maintenance jobs.
- \*Hot dip galvanizing.

#### SPECIFICATION:

- \*Overall dimensions (LxWxH): 13767mm x 2720mm x 536mm
- \*Working flat dimensions (LxWxH): 12220mm x 2720mm x 518mm
- \*Capacity: 36000kgs
- \*Tyres: Front 266x160 solid rubber (24nos), Rear 400x133 solid rubber (8 nos).
- \*Weight: 7500kgs
- \*Maximum towing speed: 15km/h.




[www.handlingyumbo.com](http://www.handlingyumbo.com)  
[info@handlingyumbo.com](mailto:info@handlingyumbo.com)



## Model No.: HD-P011802

### 40FEET PALLET DOLLY WITH ROLLER INDEX

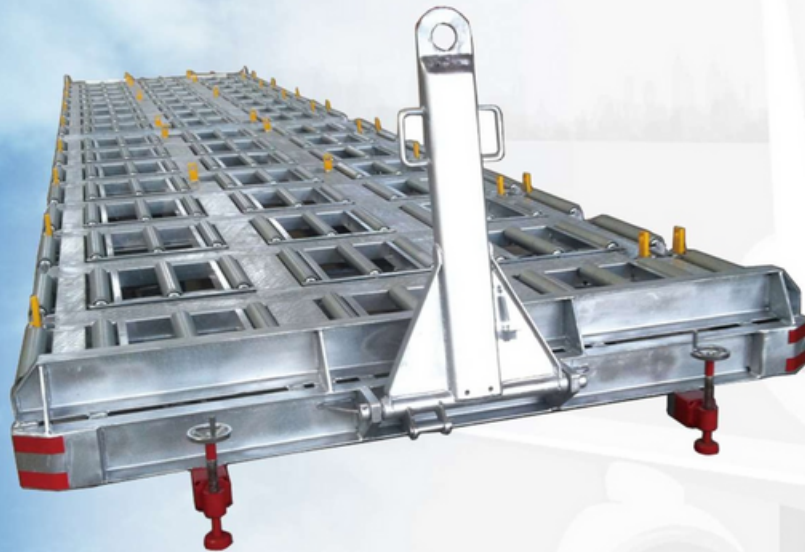

## Model No.: HD-P011802

### 40FEET PALLET DOLLY WITH ROLLER INDEX

#### FEATURES:

- \*ULD to handle: 20ft, 40ft pallet or any other big size cargo.
- \*96" end loading or 500" side loading ( By changing the roller index direction ).
- \*Durable steering swivel castors design of non floating to reduce damage to the swivel castors on bumpy ground.
- \*Adjustable support feet work as the brake.
- \*Heavy duty 76mm dia. roller.
- \*Heavy duty 112mm dia. lead-in rollers at the end and 16x76mm dia. lead-in rollers at each side.
- \*Heavy duty frame with high quality steel and flux core MIG welding.
- \*Easy maintenance jobs.
- \*Hot dip galvanizing.

#### SPECIFICATION:

- \*Overall dimensions (LxWxH): 13934mm x 2643mm x 536mm
- \*Working flat dimensions (LxWxH): 12412mm x 2643mm x 518mm
- \*Capacity: 36000kgs
- \*Tyres: Front 266x160 solid rubber tyres (24nos),  
Rear 400x133 solid rubber tyres ( 8 nos).
- \*Weight: 7500kgs
- \*Maximum towing speed: 15km/h.



[www.handlingyumbo.com](http://www.handlingyumbo.com)  
[info@handlingyumbo.com](mailto:info@handlingyumbo.com)